

45 Eagle Street, Suite 202 • Providence RI 02909 (401) 861-9046 • FAX (401) 861-9038 www.wrwc.org

## **Bid Form for Gateway Signage Fabrication**

The Woonasquatucket River Watershed Council requests a quote for custom fabricated signage for installation along the Woonasquatucket River Greenway Bike Path including a minimum of 4 primary signs, 1 secondary sign, and 4 map info signs, with potential for more. Please submit bids for the following specifications to the address below in a dated and sealed envelope.

Gateway Signage Fabrication bid due Friday November 20, 2020 and will be read publically at 4:00 PM.

Submit to:

WRWC 45 Eagle Street Suite 202 Providence RI 02909

Company Name:		
Contact:		
Address:		
Phone:		
Email:		

## **Specifications**

- See attached signage documents w/ dimensions and specifications.
- Awardee shall carry the quoted price for up to 4 years.
- Fabricator shall provide shop drawings for final review and will specify any recommended updates.
- WRWC shall provide all final artwork, color specifications, and design feedback.




45 Eagle Street, Suite 202 • Providence RI 02909 (401) 861-9046 • FAX (401) 861-9038 www.wrwc.org


## **Bid Form for Gateway Signage Fabrication**


	Per Unit Price
Primary Signs – Sign Type 11 (min of 4)	
Secondary Signs – Sign Type 12 (min of 1)	
Map Info Signs – Sign Type 13 (min of 4)	

<sup>\*</sup> Include portfolio or work samples to show capacity for similar work.

You may provide a hard copy or link to online samples.

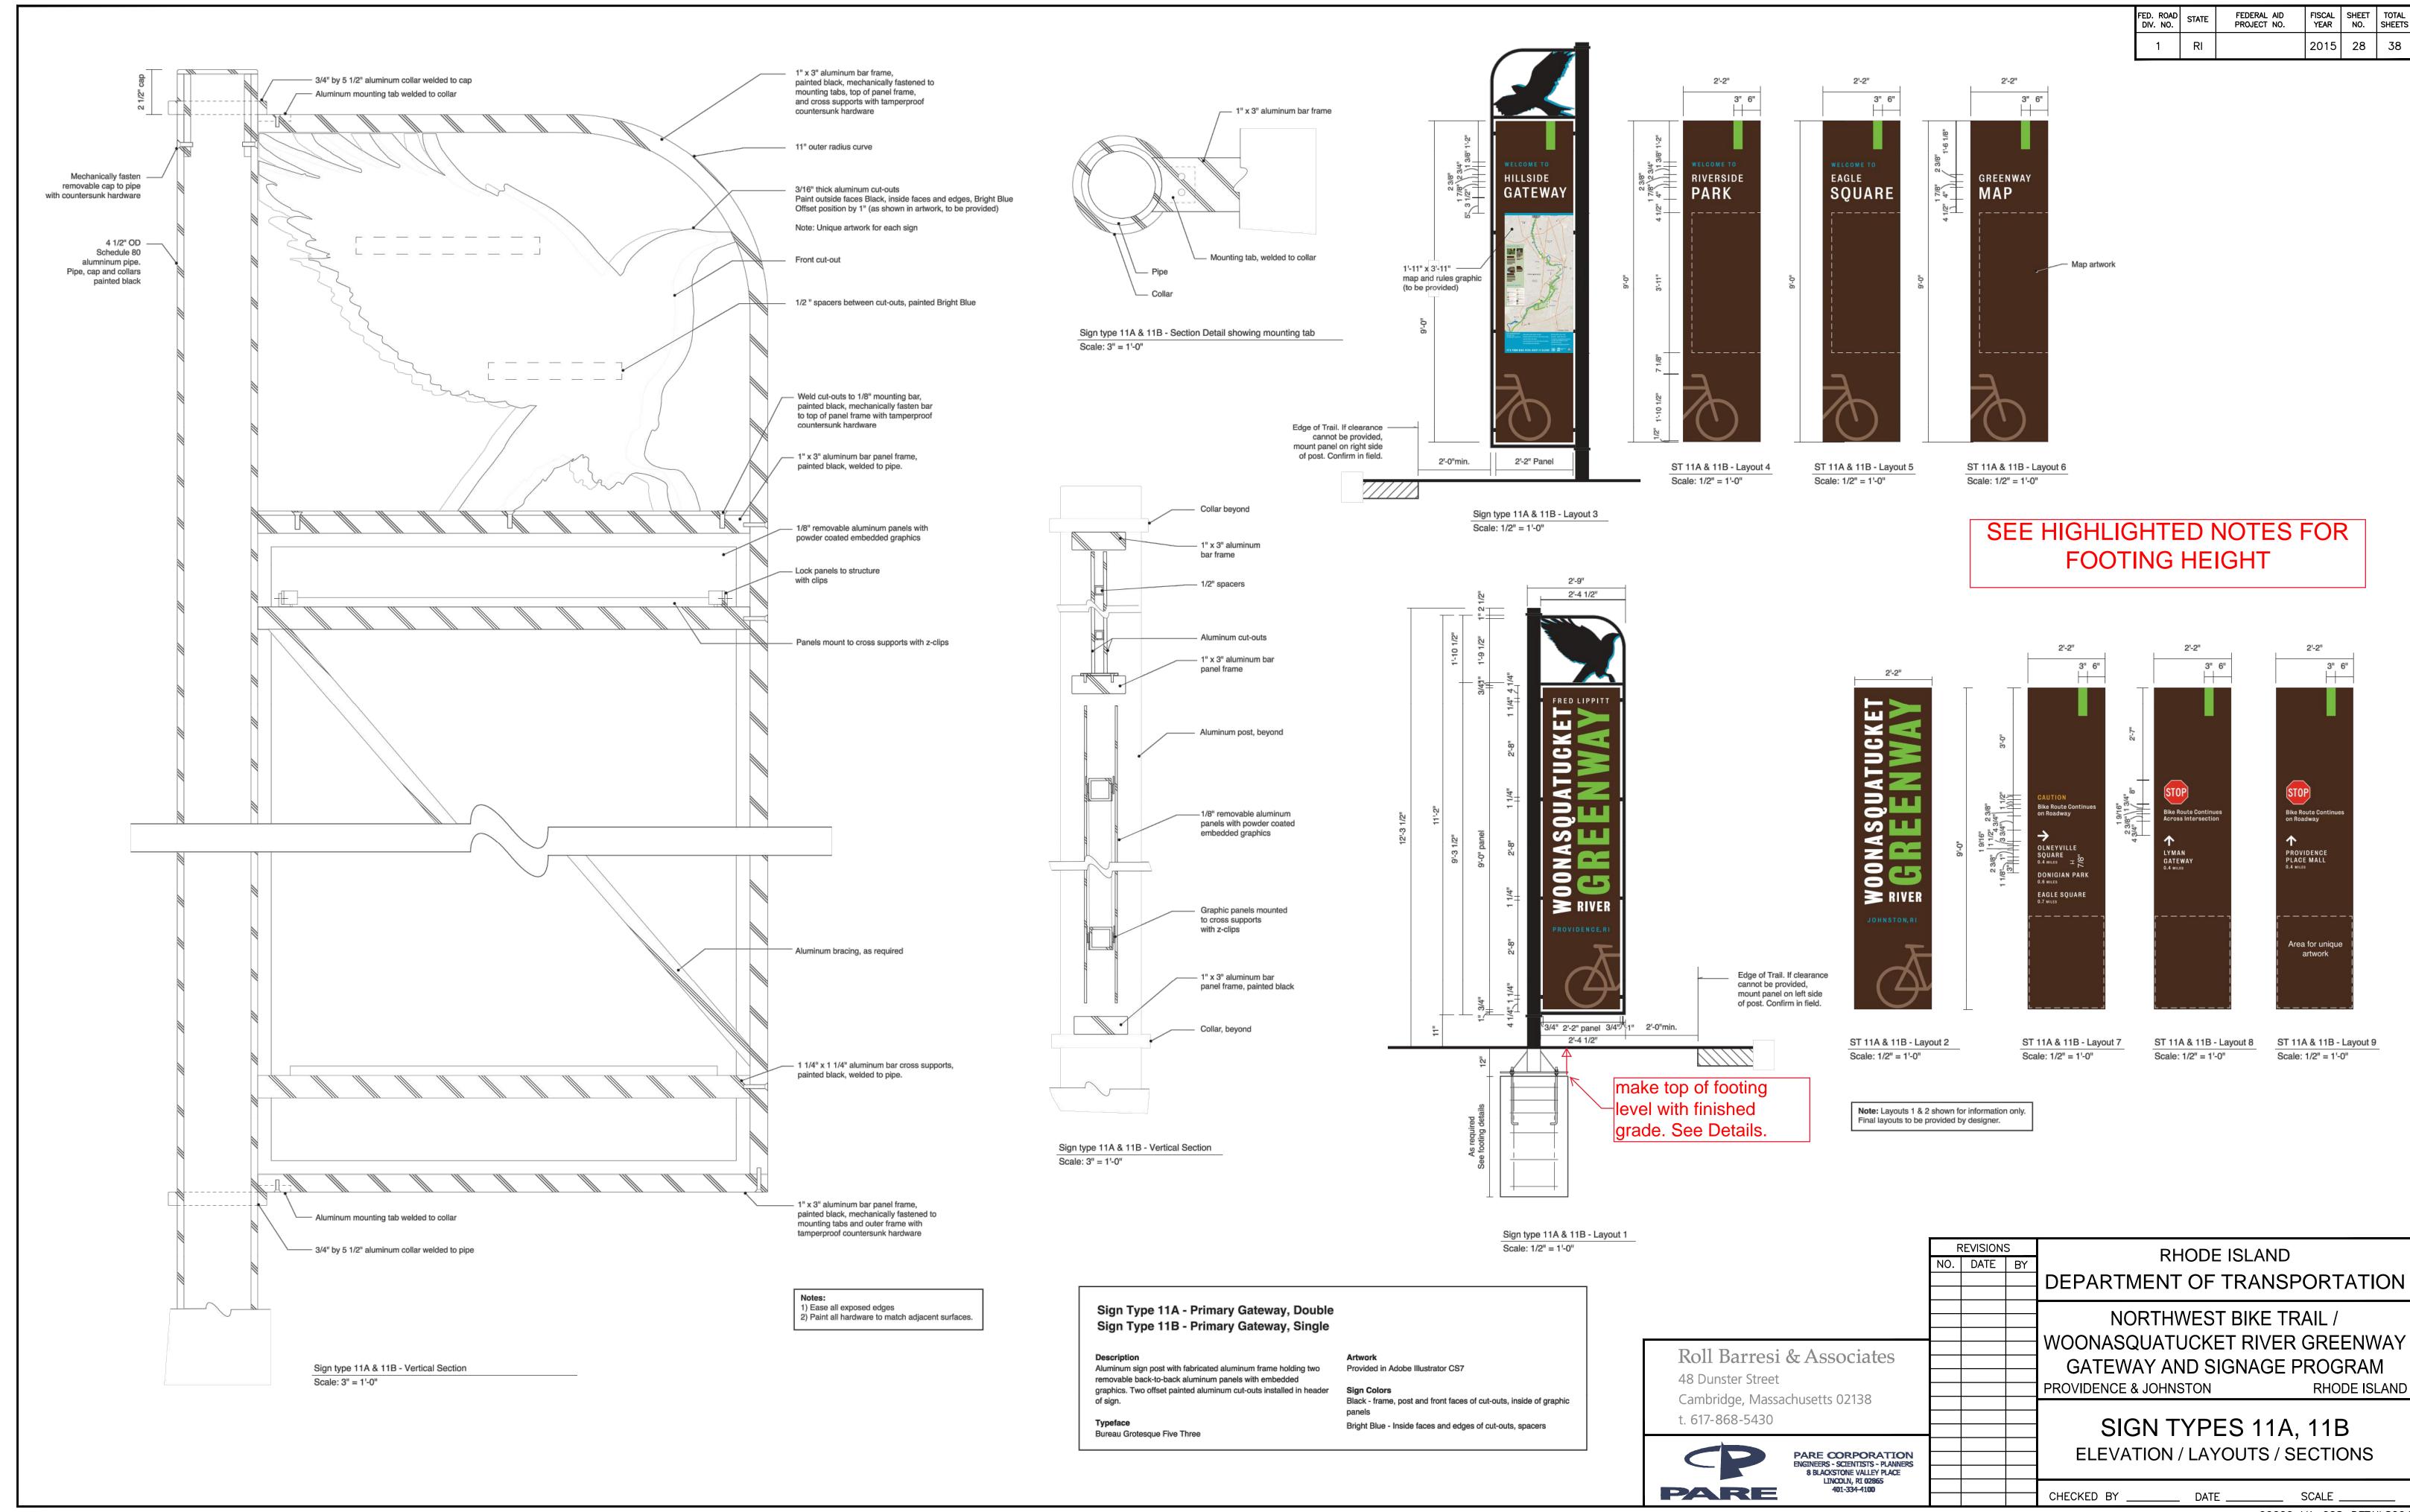

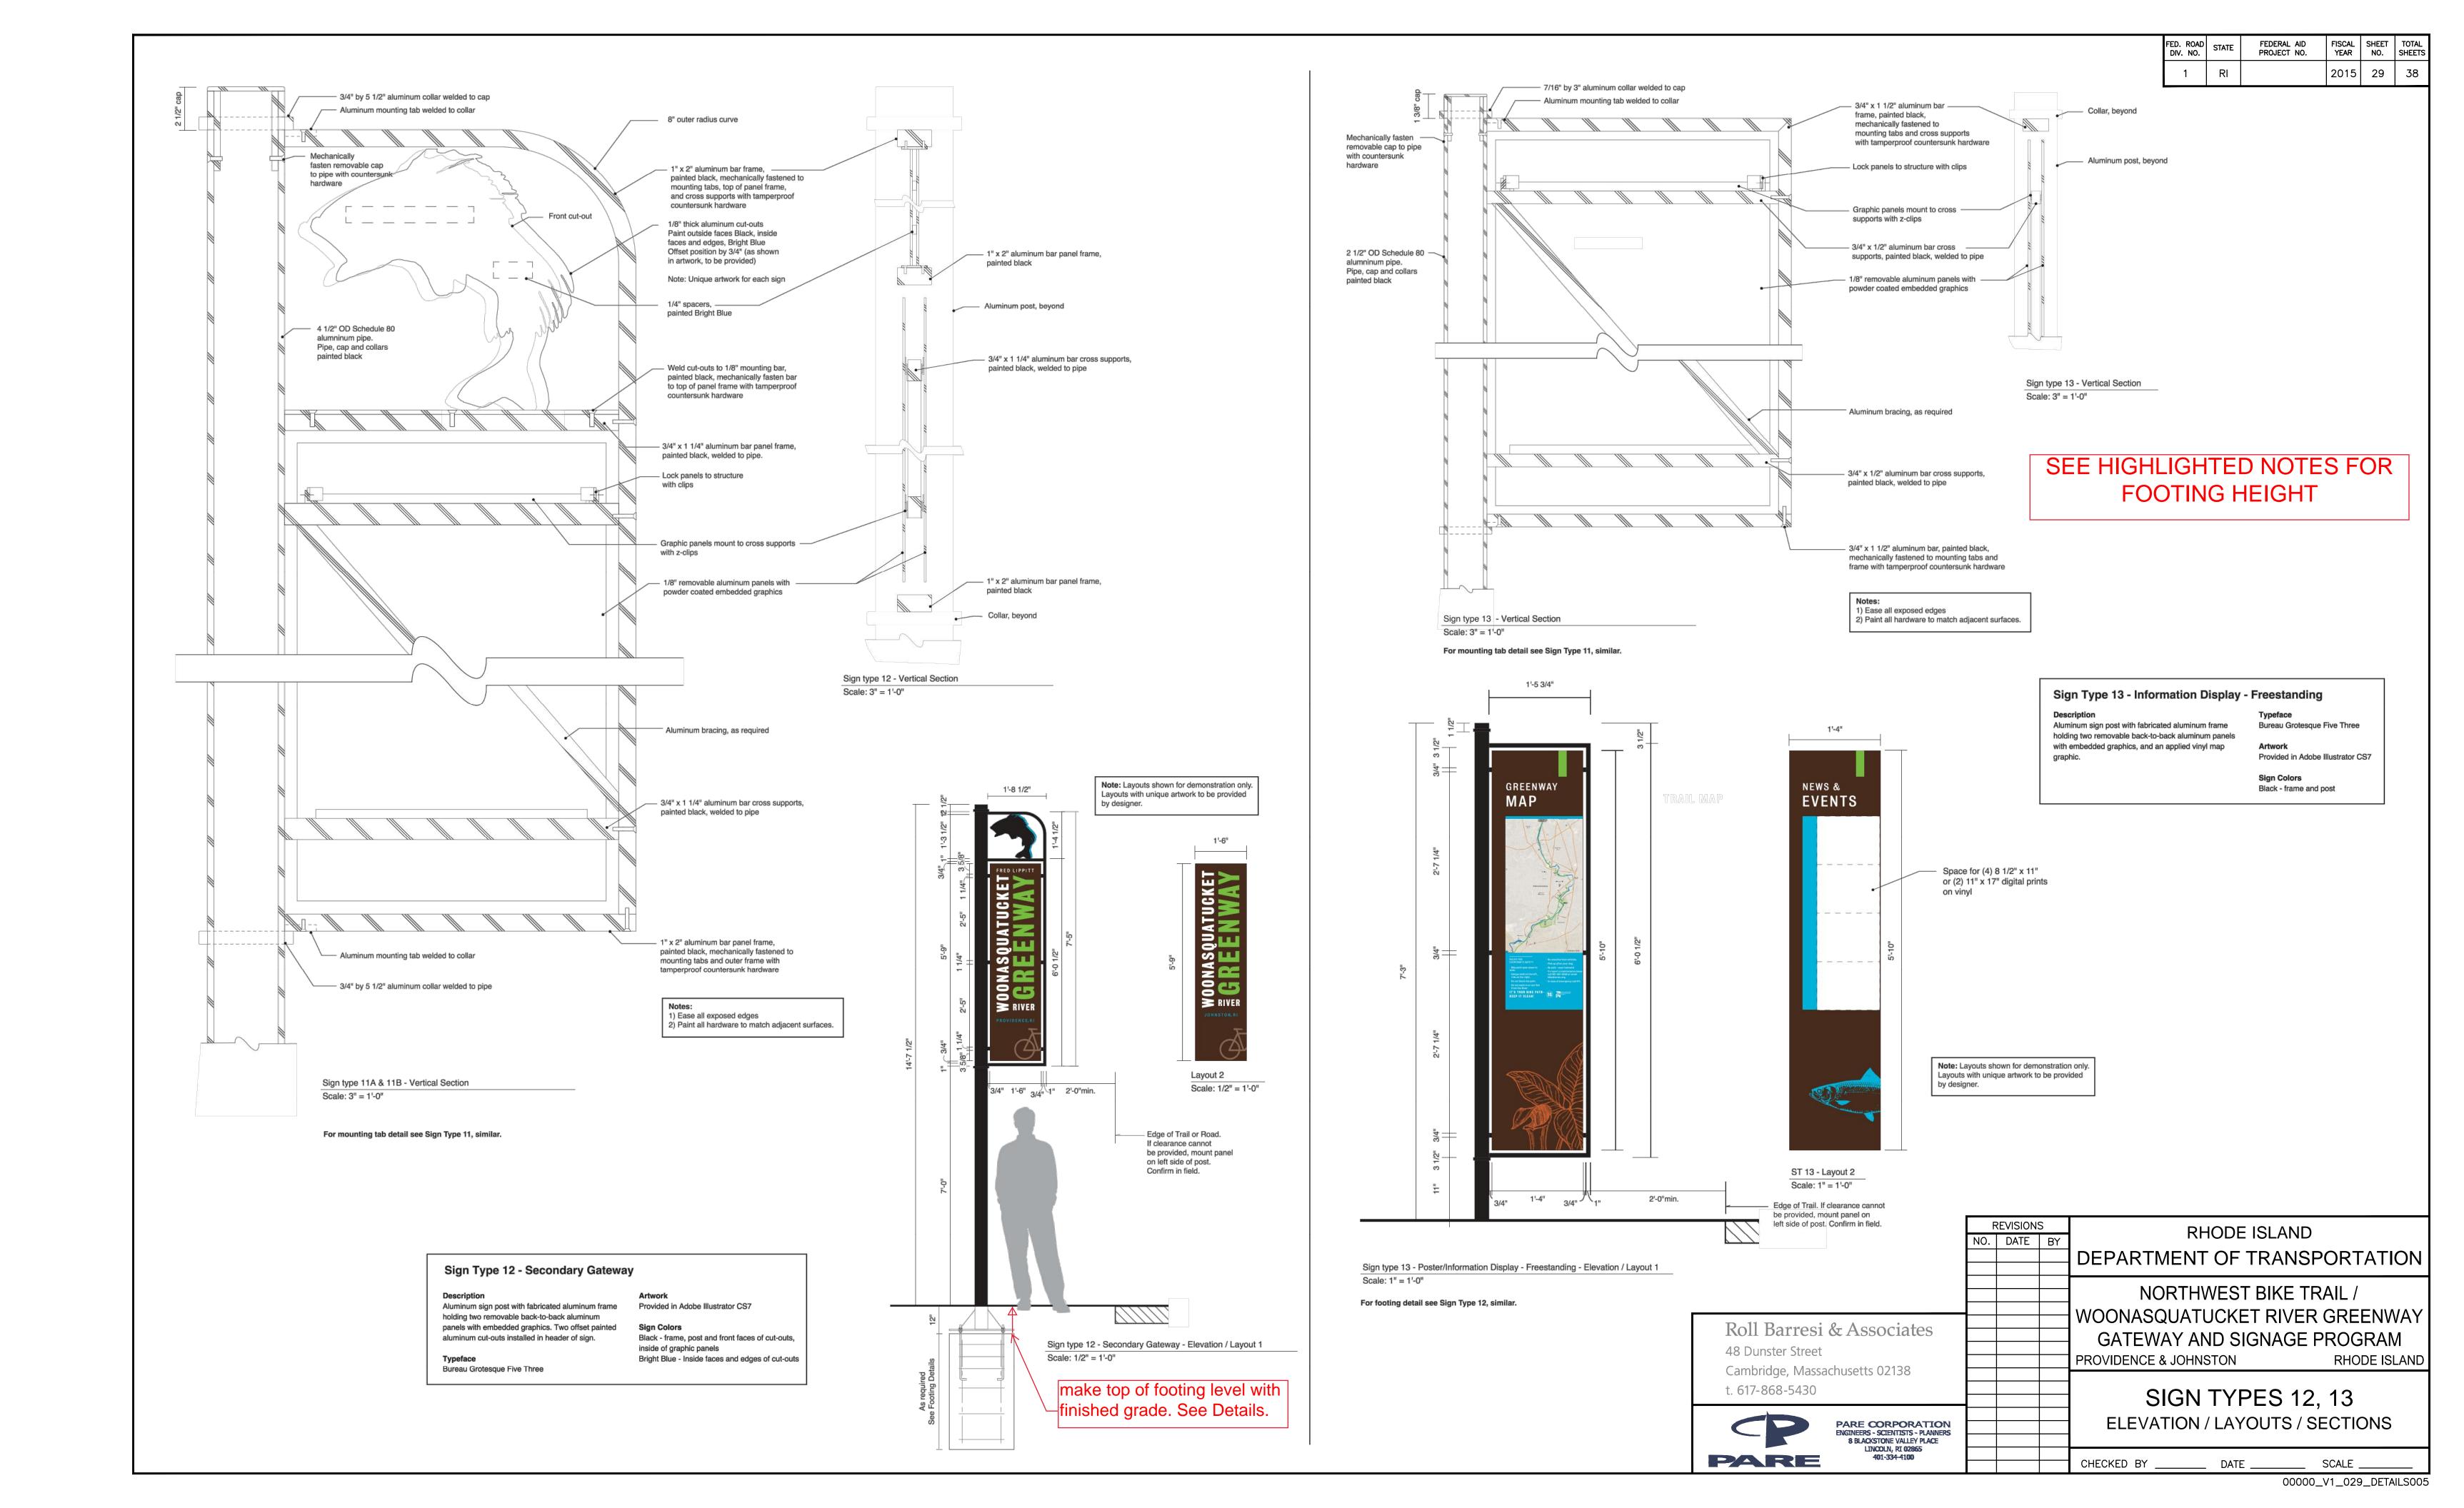

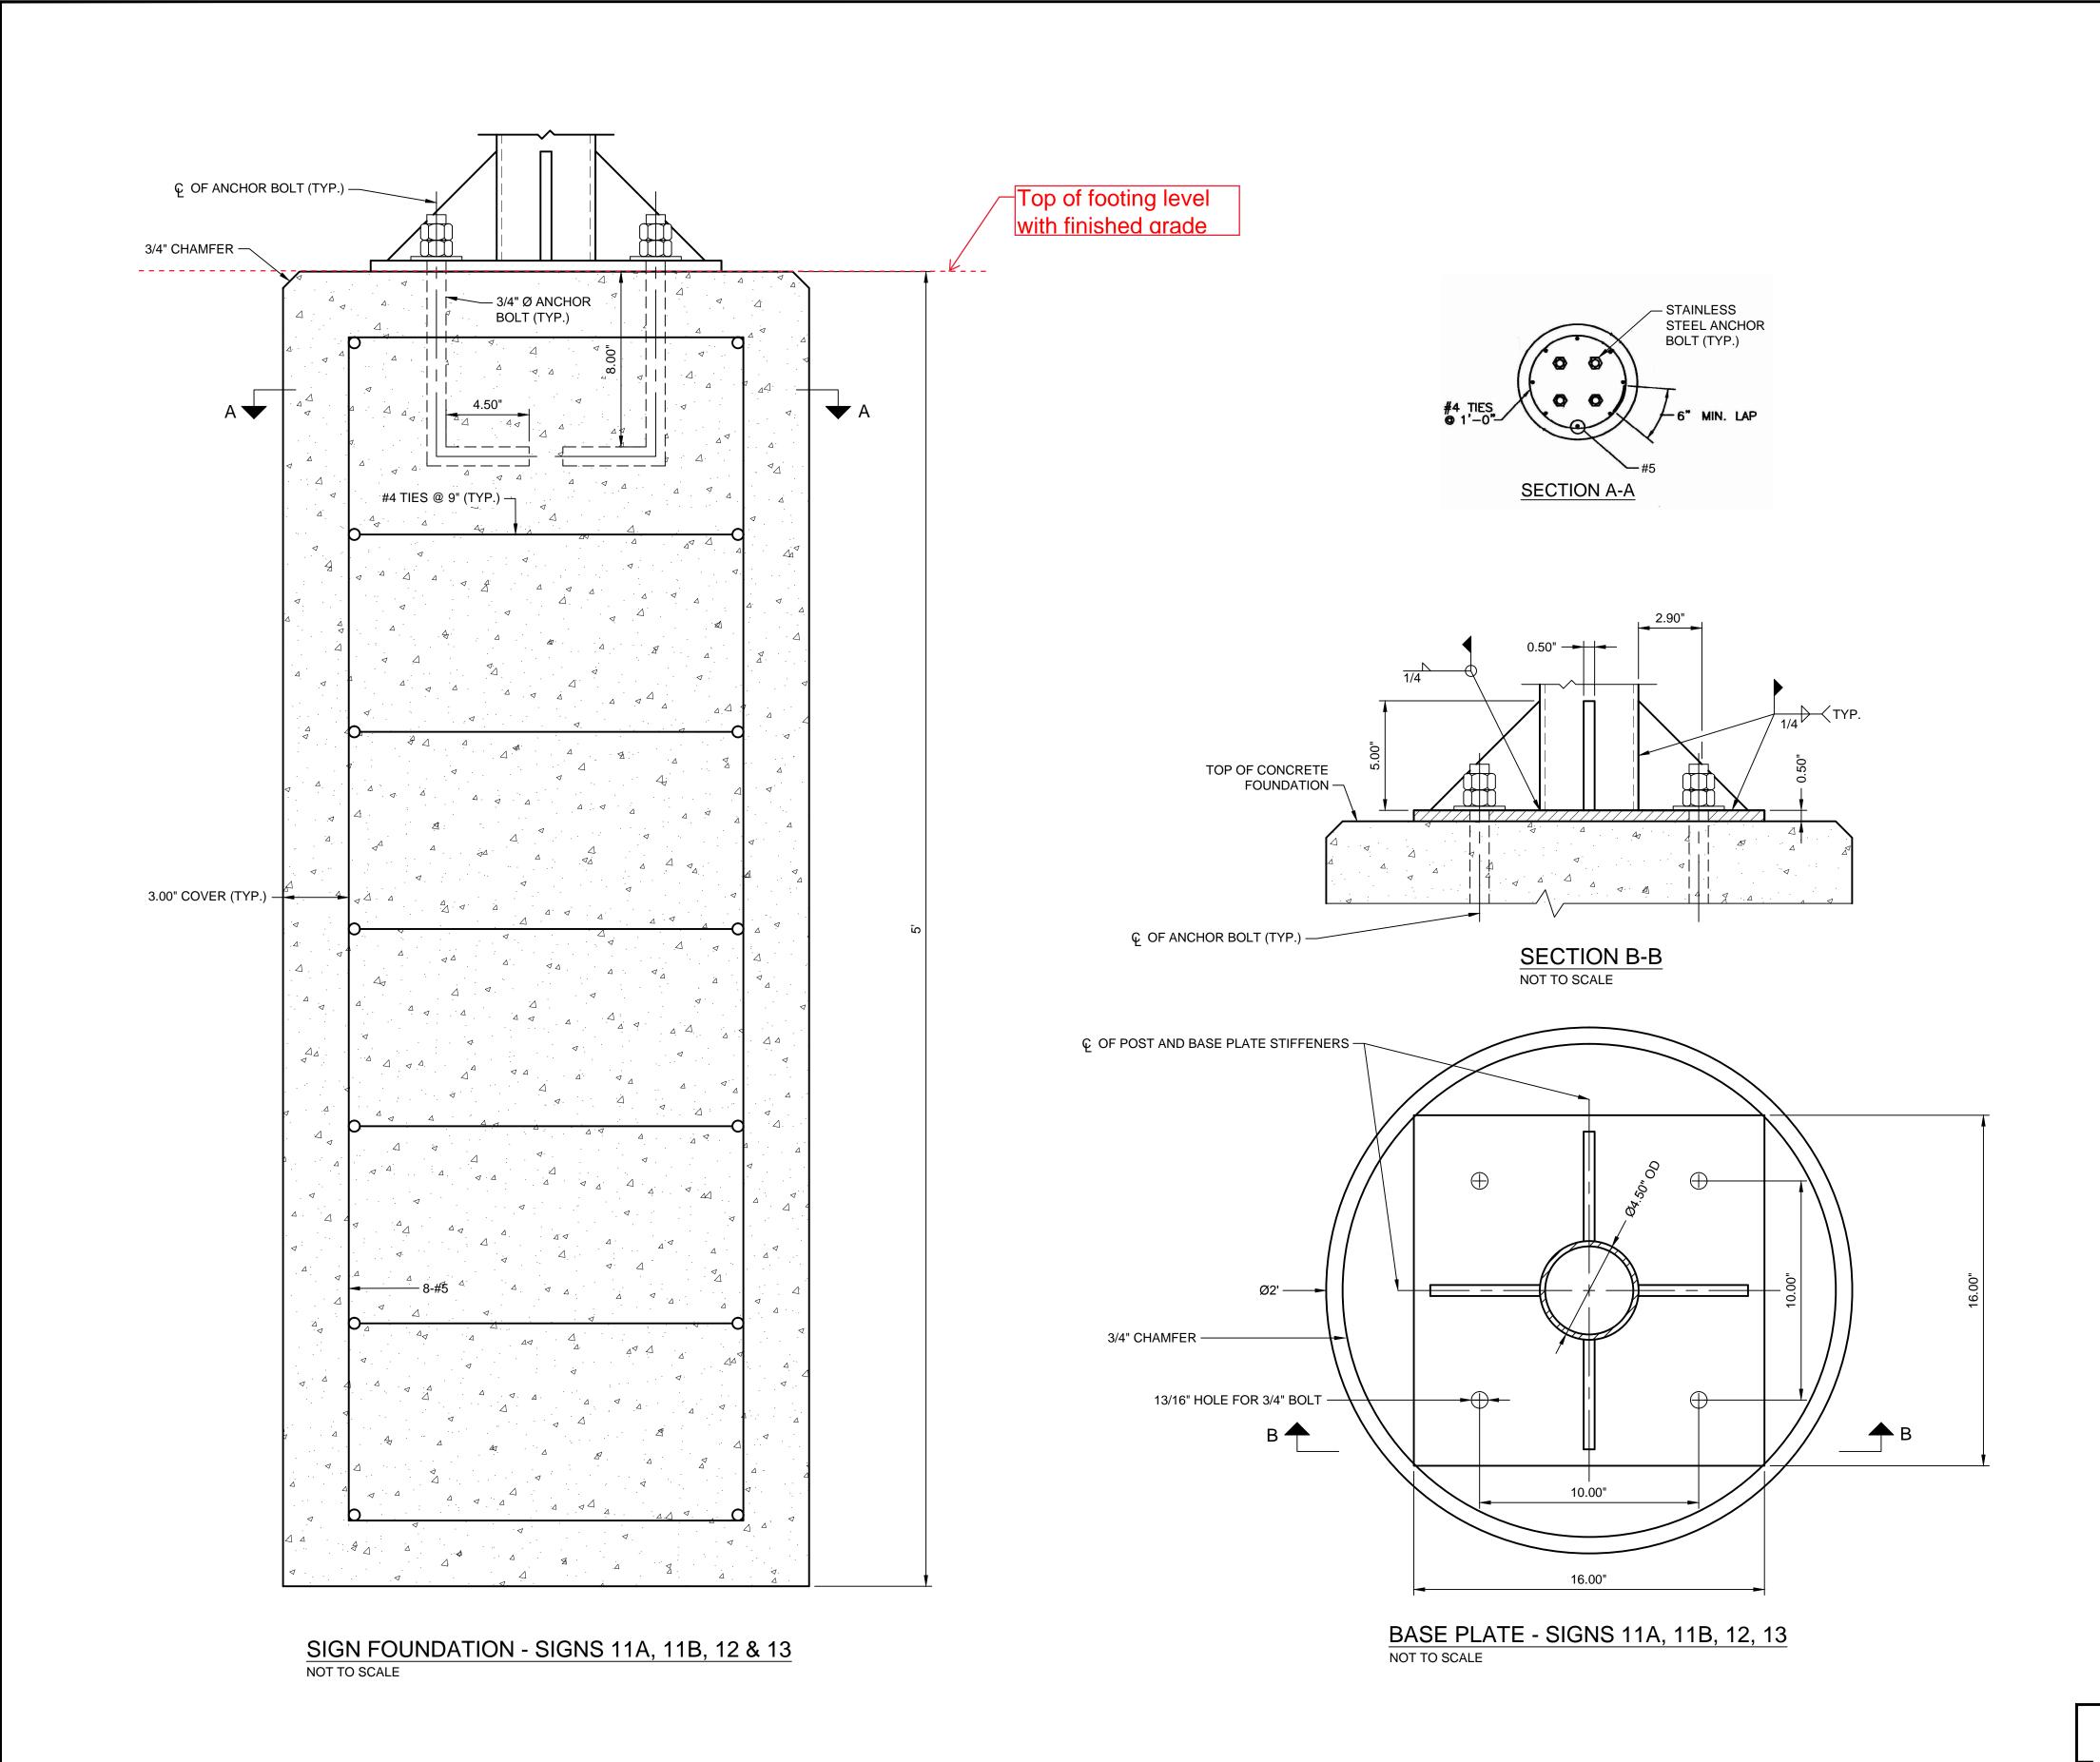

## BASE PLATE AND FOUNDATION NOTES:

1. THE BASE PLATE AND STIFFENERS SHALL BE GRADE ASTM-B221 ALLOY 6061-T6 ALUMINUM. WELDS CONNECTING ALUMINUM COMPONENTS SHALL BE FILLER ALLOY 5536

FEDERAL AID PROJECT NO.


FISCAL SHEET TOTAL YEAR NO. SHEETS

2015 | 36 | 38

- ALL UNPAINTED ALUMINUM COMPONENTS BELOW GRADE AND/OR IN DIRECT CONTACT WITH CONCRETE SURFACES SHALL BE COATED WITH ALKALI RESISTANT BITUMINOUS PAINT OR OTHER COATING WITH EQUIVALENT PROTECTION.
- 3. ANCHOR BOLTS SHALL BE STAINLESS STEEL ASTM GRADE A193 B8M CLASS 1 OR BETTER. NUTS SHALL BE ASTM GRADE A194 B8M CLASS 1 OR BETTER. ALL ANCHOR BOLTS, NUTS, AND WASHERS SHALL BE 316 STAINLESS STEEL.

4. CONCRETE SHALL HAVE A MINIMUM 4000 PSI 28 DAY COMPRESSIVE STRENGTH. ALL

STEEL REINFORCING SHALL BE AT A MINIMUM ASTM A615 GRADE 60.

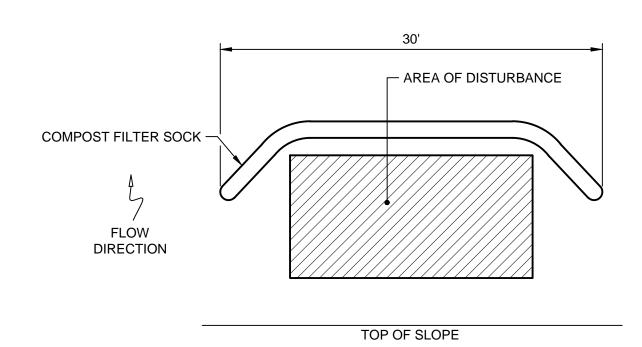

TYPICAL EROSION CONTROL INSTALLATION - SIGNS 11A, 11B, 12 & 13
NOT TO SCALE

SEE HIGHLIGHTED NOTES FOR FOOTING HEIGHT

	REVISIONS		S	RHODE ISLAND		
	NO.	DATE	BY			
				DEPARTMENT OF TRANSPORTATION		
				NORTHWEST BIKE TRAIL /		
				WOONASQUATUCKET RIVER GREENWAY		
				GATEWAY AND SIGNAGE PROGRAM		
File: T:\14120.00 W	$\frac{2}{}$	/C	Gr	PROVIDENCE & JOHNSTON OF REPORT ISLAND	0	
Alperinto 100 invalid	$\rightarrow$	efe	er	ence <b>DETAILS</b>		
PARE CORPORATION				DETAILS		
ENGINEERS - SCIENTISTS - PLANNERS  8 BLACKSTONE VALLEY PLACE LINCOLN, RI 02965						
401-334-4100				CHECKED BY DATE SCALE		